

AWS800D-1UMC

Summary

AWS800D-1UMC is a 800W AC/DC constant current mode output LED driver complies with DALI standard protocol IEC 62386. AWS800D-1UMC can be connected to DALI main controller smooth dimming effect.

Product Features

- ·Meet DALI Protocol IEC 62386-207
- ·High efficiency up to 95 %
- ·Built-in active PFC function
- ·Dimming effect smooth, no flicker
- ·Protections: Short circuit, over load, Over Voltage
- ·Suitable LED lighting application, such as down light, Spotlight, Flood Light, and so on




Technical Paramaters


Model	AWS800D-1UMC	
Input	Efficiency	≥95%@230VAC,Full load
	Voltage	100VAC-277VAC
	Frequency Range(Hz)	50/60Hz
	Power Factor	≥0.95@230VAC,Full load
	THD(full load)	≤15%@230VAC, Full load
	Standby Power	<2W
	AC Current(max)	9A max@100VAC
	Inrush Current(max)	Cold start,100A@230VAC 1.5ms
Output	Current(mA)/Voltage (VDC) Power(W)	14A/27-54VDC/800W
	Channel	1
	Current Tolerance	±5%
	No load output voltage	59Vmax
	Auxiliary Power	12V±5% 300mA max
Function	Dimming Type	DALI
	Dimming Range	5%-100%
Protection	Short Circuit	Close the output and recover after troubleshooting
	Over Load	Reduced current, hiccup protection
	Over Voltage	Reduced current, hiccup protection
Safety& EMC	Surgy	L-N 6KV L-PE 10KV N-PE 10KV
	Withstand Voltage	I/P-O/P: 3000Vac/1min/<10mA
	Safety Standards	EN61347, GB19510
	EMC Eission	EN50515, EN61000-3-2
	EMC Immunity	EN61000-4-2, 3, 4, 5, 6, 8, 11; EN61547
Others	Working Temp.	-20℃-50℃
	Storage Temp., Humidity	-40℃~85℃, 20-90%RH
	tc	90℃
	Material	Metal
	IP Rating	IP67
	Lifetime	50,000h@tc:70℃
	Warranty Condition	5 years
	Switch Cycle	>25,000 times
	Packing(weight) Dimension	Net weight: 3250g±5%/PCS; 3PCS/Carton; 10kg±5%/Carton; Carton Size:318*210*226mm(L*W*H) 279*144*50mm (L*W*H)
	Dilliension	277 144 JUILIII (L W II)


^{*} Input voltage less than 120VAC, load should be ≤90%




Dimension(mm)

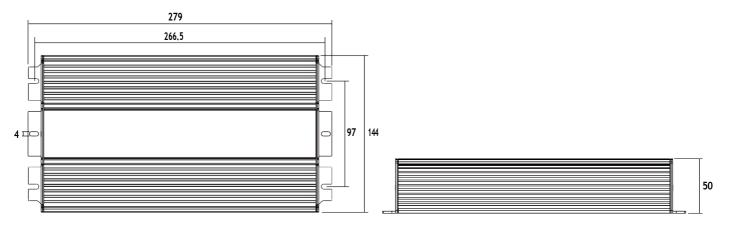

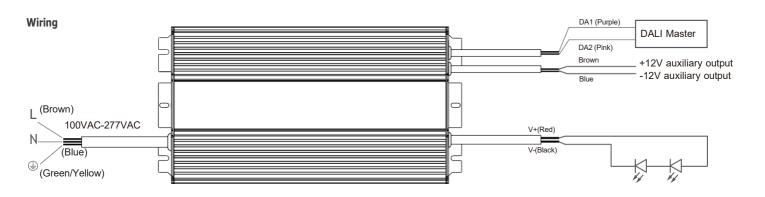

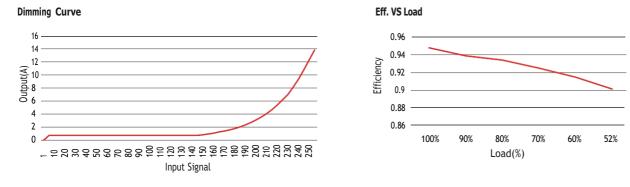

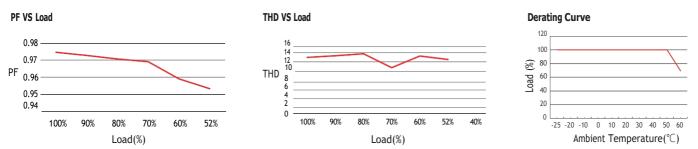

Cautions

- 1. This product should be installed by qualified personnel.
- ${\tt 1.} \ {\sf Good\ heat\ dissipation\ conditions\ extend\ product\ life.\ Please\ install\ the\ product\ in\ a\ well-ventilated\ environment.}$
- 1. Please make sure LED power supply output voltage, current is used to meet the product requirements.
- 4 Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current. Please also ensure that the cable is secured tightly in the connector.
- 5. In case of malfunction, do not repair it yourself.

[※] The contents of this manual are updated without prior notice. If the function of the product you are using is inconsistent with the instructions, the function of the product shall prevail. Please contact us if you have any questions . 如有疑问请与我们联系。